

Pallet Truck Specification


Optional ExStandard Pallet Truck (15 combinations) 2500KG capacity					
Fork Length A	940 (37")	1010 (40")	1060 (42")	1140 (45")	1215 (48")
Fork Width B	470 (18.5")		521 (20.5")		686 (27")

Options	
<ul style="list-style-type: none"> Capacities 3000KG with strengthened frame & slow lowering valve 	
<ul style="list-style-type: none"> Wheel Options Polyurethane – harder wearing, longer life Rubber steer wheels – for smooth, quick operation and maximum floor protection Steel – ideal for foundries or swarf littered floors Tandem load wheels – for easy pallet entry or uneven surfaces Rubber sided bearings for damp environments 	
<ul style="list-style-type: none"> Special Widths & Lengths (May reduce capacity) Widths: Minimum 343 to maximum 1143 Lengths: Minimum 660 to maximum 2020 	
<ul style="list-style-type: none"> Frames Galvanised frame for extra protection with powder coated pump unit Hinged or fixed stillage frame 	
<ul style="list-style-type: none"> Brake Systems Parking Brake Dead Man Brake: <ul style="list-style-type: none"> Operates as dead man brake & parking brake, & to slow the truck on ramps Ideal for use on tail lifts Twin automotive brake operates on steer wheels Brakes fitted with separate adjusters Articulating axle keeps both braked wheel in contact with the floor 	
<ul style="list-style-type: none"> Pump Unit Options Cold Store protection (For temperatures as low as –30 degrees) Overload valve Slow lowering valve 	

Low Profile Pallet Truck (Raised height 184, 63 closed height) 1500KG capacity, fitted with nylon steer wheels and single steel load rollers			
FORK LENGTH A	940 (37")	1060 (42")	1215 (48")
FORK WIDTH B	470 (18.5")	521 (20.5")	686 (27")

Paper Reel Truck - Fitted with nylon steer wheels and single nylon load rollers 1500KG capacity, standard fork length 1150 (45")				
Type	Maximum Reel Size	Minimum Reel Size	Dimension Over Fingers	Dimension Inside Fingers
RT945-1500-NSN	940 (37")	500 (20")	810 (32")	374 (14.75")
RT1245-1500-NSN	1240 (48.5")	600 (24")	896 (35.5")	460 (18")
RT1545-1500-NSN	1510 (59.5")	750 (29.5")	964 (38")	528 (20.75")

All dimensions are in mm unless otherwise shown

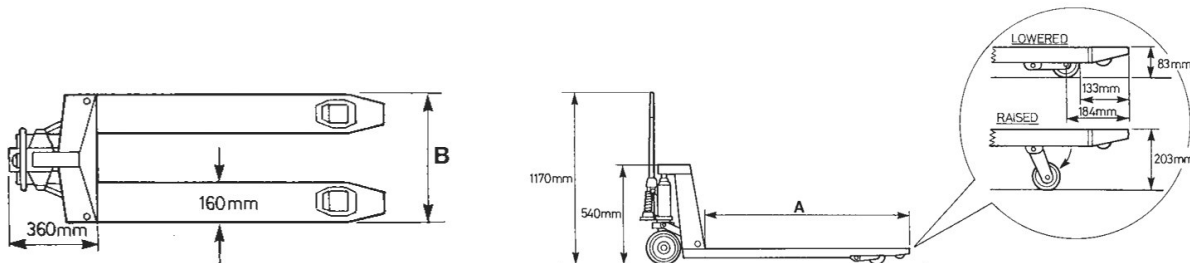

This document was downloaded from – www.manualhandlingsolutions.com